

# **IOT Based Smart Plant Monitoring System**

**Bande Rushikesh, Shete Rutuja, Narwade Ritesh**

1,2&3 Students, Department of Electronics and Telecommunication Engineering

JSPM's Bhivarabai Sawant Institute of Technology & Research, Wagholi, Pune, Maharashtra, India.

**Abstract:** *Internet of things is one of the most easily accessible form of connectivity. It can be used for a plethora of applications. Proper irrigation is still a challenge in most of the agriculture practices. Improper supply of water can affect both the soil and the crops. A feasible monitoring or controlling system can be of great use to overcome this problem. In this project, IOT is employed to create a smart monitoring system for the crops. This can help in improving the yield without affecting the soil quality. Measuring the features like temperature, humidity and soil moisture is the key aspect of the system.*

**Keywords:** Internet of Things, Feasible Monitoring, Smart Monitoring, Without Affecting Soil Quality

## **I. INTRODUCTION**

In India, Agriculture is the backbone of our country; most of the people depend on agriculture. The main issue in agriculture is water scarcity. The water resources is not employed in the good manner, so that the water is wasted. Proper irrigation is still a challenge in most of the agriculture practices. Improper supply of water can affect both the soil and the crops. A feasible monitoring or controlling system can be of great use to overcome this problem. Agriculture around the world plays important role in the development of agricultural nations. In India almost 68% of people depend upon farming and 1/3 of the national capital comes from agricultural. Problems related agriculture have been always preventing the progress of the nation. The solution to this problem can be solved by smart agriculture and modernizing the present traditional methods of farming. Hence the aim of the project is to implement hydroponic system using IoT technologies using Node MCU. The major features of this project include water driven agriculture system that will eliminate need for soil. With this hydroponic automated system, the crops area unit provided with water and nutrients reckoning on the sensors feedback like temperature and humidity sensor and electrical physical phenomenon circuits.

## **II. LITERATURE SURVEY**

The rapid advancement of Internet of Things (IoT) technology has opened up new possibilities in various domains, including agriculture and horticulture. . One such application is the development of IoT-based smart plant monitoring systems. These systems leverage the power of IoT to monitor and control various environmental factors such as temperature, humidity, soil moisture, and light intensity, thereby optimizing plant growth and yield. The rapid advancement of Internet of Things (IoT) technology has opened up new possibilities in various domains, including agriculture and horticulture. One such application is the development of IoT-based smart plant monitoring systems. These systems leverage the power of IoT to monitor and control various environmental factors such as temperature, humidity, soil moisture, and light intensity, thereby optimizing plant growth and yield.

The objective of this literature survey is to delve into the existing research and development efforts in the field of IoT-based smart plant monitoring systems. By examining the state-of-the-art techniques, challenges, and potential solutions, this survey aims to provide a comprehensive understanding of the current landscape and identify future research directions.

The literature survey introduction provides a foundational overview of the IoT-based Smart Plant Monitoring System, emphasizing its significance in modern gardening and agriculture. As the demand for efficient and sustainable plant care increases, traditional monitoring methods often fall short in terms of real-time data acquisition and resource optimization. This survey aims to explore existing research on smart plant monitoring technologies, highlighting the challenges faced in conventional practices, such as inconsistent watering and inadequate environmental control. By



reviewing various IoT solutions, sensor technologies, and data analytics methods, this survey seeks to identify trends in the literature and pinpoint gaps in current knowledge that need to be addressed. The findings will not only inform future research directions but also contribute to the development of more effective and automated plant care systems.

By examining the state-of-the-art techniques, challenges, and potential solutions, this survey aims to provide a comprehensive understanding of the current landscape and identify future research directions

### III. WORKING METHODOLOGY:

In the block diagram, we can see that two sensors are used namely DHT11 for temperature and humidity, Soil moisture sensor, a relay circuit to control the water pump. Single bus data format is used for synchronization between DHT11 and MCU sensor. One communication process is takes about 4ms. Data consists of integral and decimal parts. A complete data transmission is of 32bit, and the sensor sends higher data bit first. Data format: 8bit integral humidity data + 8bit decimal humidity data + 8bit decimal temperature data + 8bit check sum (Error bits). If the data transmission is right, the check-sum should be the last 8bit of "8bit integral humidity data + 8bit decimal humidity data + 8bit integral temperature data + 8-bit decimal temperature data". All these sensors are interfaced to an open source Node-MCU (ESP8266) which will act as a microcontroller. This microcontroller is also interfaced with 5V power supply. Valves and solenoid Pumps are being controlled by the Node-MCU for efficient working of system. All this information is being send to a Blynk app. The controlling of whole system is automated using NodeMCU and IoT system. The dispenser is employed to combine the nutrients with the water. The water containing nutrients is passed to the pipes with facilitate to submersible pumps. The water that is not absorbed by the crops is reused by adding nutrients in keeping with the reading from sensor and once more passed to the pipes.

#### 3.1 BLOCK DIAGRAM :

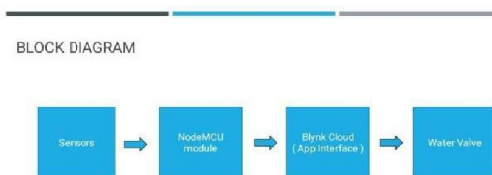


Fig 1: Block Diagram of the System

#### 3.2 CIRCUIT DIAGRAM:

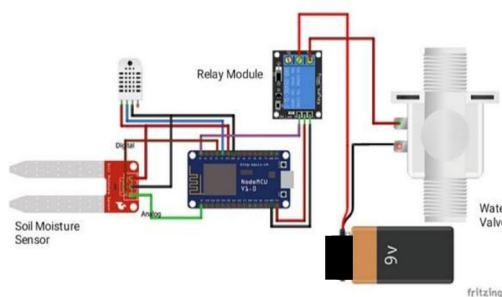


Fig 2: Circuit Diagram of the System

### IV. HARDWARE DESCRIPTION

#### 4.1 Node-MCU ESP8266:

Node-MCU is an open source firmware for which open source prototyping board designs are available. The prototyping hardware typically used is a circuit board functioning as a dual in-line package (DIP) which integrates a USB controller with a smaller surface-mounted board containing the MCU and antenna.





Fig 3 : Node MCU

#### 4.2 Soil Moisture Sensor:

Soil moisture sensors measure the volumetric water content in soil. Since the direct gravimeter measurement of free soil moisture requires removing, drying, and weighing of a sample, soil moisture sensors measure the volumetric water content indirectly by using some other property of the soil, such as electrical resistance, dielectric constant, or interaction with neutrons, as a proxy for the moisture content.




Fig 4: Soil moisture sensor

#### 4.3 Relay Module:

Relay is an electromechanical device that uses an electric current to open or close the contacts of a switch. The single-channel relay module is much more than just a plain relay, it comprises of components that make switching and connection easier and act as indicators to show if the module is powered and if the relay is active or not.



Fig 5: Relay module

#### 4.4 Solenoid Water valve:

A solenoid dosing pump is a form of positive displacement pump which uses a diaphragm and solenoid assembly to displace the fluid into the discharge line. The solenoid 'drive' consists of an electromagnet and spring assembly, which is activated/deactivated with a series of electrical impulses.



Fig 6: Solenoid Water valve



#### 4.5 DHT11 Temperature sensor:

The DHT11 is a basic, ultra low-cost digital temperature and humidity sensor. It uses a capacitive humidity sensor and a thermistor to measure the surrounding air, and spits out a digital signal on the data pin (no analog input pins needed). Its fairly simple to use, but requires careful timing to grab data.




Fig 7: DHT11 sensor

### V. SOFTWARE DESCRIPTION:

#### 5.1 Arduino IDE

The Arduino Integrated Development Environment - or Arduino Software (IDE) - contains a text editor for writing code, a message area, a text console, a toolbar with buttons for common functions and a series of menus. It connects to the Arduino and Genuino hardware to upload programs and communicate with them.



Fig 8: Arduino Logo

#### 5.2 BLYNK App:

Blynk app is an open source android application that can be used to build IoT applications in 5 minutes. It works with Arduino, ESP8266, ESP32, Raspberry Pi etc. It can be used to control these micro-controllers with the smartphone over the internet. Bluetooth and BLE is supported too.



Fig 9: Blynk App Logo



### VI. ALGORITHM

1. START
2. Initialize all the devices, DHT11, Soil moisture sensor, Buzzer, Node mcu and mobile application
3. Collect the sensors output .
4. Display the value on Mobile app
5. Check the value of Soil moisture



- a. If value > threshold, turn on the water pump
- b. If value < threshold, go to step 4.
6. Check the value of DHT11
7. Sending alert messages to the user using Wifi module
8. Go to step 3

#### 6.1 FLOW CHART:

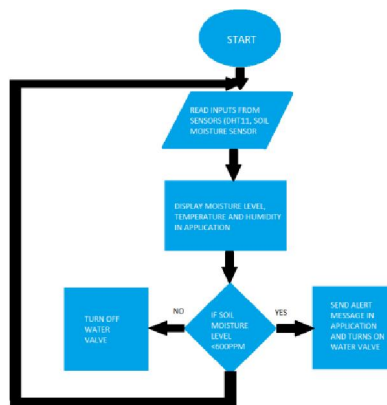


Fig 10: Flowchart of the System

#### VII. RESULTS

The Output of the proposed system is fast, accurate and secure. Hence, the experimental results show that the proposed system is easy to access and protects the plant from being rotten or drought.

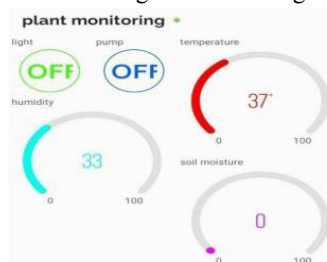


Fig 11: Blynk App Showing the Result before Added Water

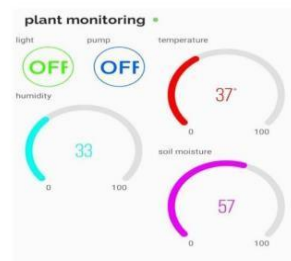


Fig 12: Blynk App Showing The Result After Added Water

#### Hardware Output:

The hardware setup of the system includes Node- MCU as the controller. It is powered by a 9V battery source. The temperature sensor and the soil moisture sensor are connected to the micro-controller using jumper wires. The relay module is used to control the solenoid valve. The control signal for the solenoid valve is provided through the micro-controller. Once the setup is complete, the next step is to link the device with the IoT application that is installed in the



smartphone. The smartphone then sends the control signals that control the on and off functions of the solenoid water valve. It can be seen that the entire setup is simple, compact and very user friendly.

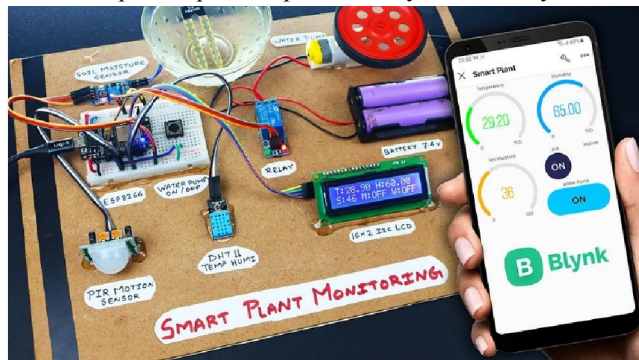


Fig 13: Hardware Design

### 7.1 Software Output:

The application installed in the android smartphone displays the parameters like soil moisture, temperature and humidity. This helps in monitoring the current condition of the plant. A button is displayed with which the solenoid water valve can be controlled. When the moisture level falls below 600 or when the temperature rises beyond normal room temperature, say 30 degrees the water valve is turned on by clicking the button.



Fig 14: Results obtained through Mobile application

Once the temperature and soil moisture levels are back to normal values, it can be turned off by clicking on the same button.

## VIII. CONCLUSION

This whole project mainly focuses on two results. The first result is to help farmers to upgrade their agriculture – technical knowledge, act in accordingly with minimum requirements on environmental issues and mostly the basic function being prevented by major disasters and protect plants and nature from being ruptured. And the second result of our project is to use technology to measure the humidity, temperature and moisture of the plant root and make the plant grow in a well suitable environment with out the use of soil as per the concept of hydroponics. The farmer or user receives the message regarding the status and thus helps in avoiding delay of plant watering and protect the plant to live in a suitable environment.





**REFERENCES**

- [1] Rohit Dange, Ejaj Attar, Pranav Ghodake, & Prof. Vaibhav Godase. (2023). Smart Agriculture Automation using ESP8266 Node MCU. Journal of Electronics, Computer Networking and Applied Mathematics (JECNAM) ISSN : 2799-1156, 3(05), 1–9. <https://doi.org/10.55529/jecnam.35.1.9>
- [2] Dr. B. Sheela Rani. et al., " Socio-realistic optimal path planning for indoor real-time autonomous mobile robot navigation" International Journal of Vehicle Autonomous system Volume 15 Issue 2: 2020. Print ISSN: 1471-0226 Online ISSN: 1741-5306 DOI :<https://doi.org/10.1504/IJVAS.2020.108399>.
- [3] Patale J. P., et al. "A Systematic survey on Estimation of Electrical Vehicle." Journal of Electronics, Computer Networking and Applied Mathematics (JECNAM) ISSN: 2799-1156
- [4] 3.01 (2023): 1-6
- [5] .R. A. Sawant, et al. "Automatic PCB Track Design Machine", International Journal of Innovative Science and Research Technology, Vol 7, Issue 9, Sept 22.35.
- [6] Rutuja Abhangaro, et al. "DESIGN AND IMPLEMENTATION OF 8-BIT VEDIC
- [7] Gadade, Bhanudas, et al. "Automatic System for Car Health Monitoring." International Journal of Innovations in Engineering Research and Technology (2022): 57-62
- [8] Mr. Sanket K Nagane, Mr. Prashant S Pawar, & Prof. V. V. Godase. (2022). Cinematica Sentiment Analysis. Journal of Image Processing and Intelligent Remote Sensing(JIPIRS) ISSN 2815- 0953, 2(03), 27–32. <https://doi.org/10.55529/jipirs.23.27.32>
- [9] Asif Siddiq, Annum Zehra, Muhammed Owais Tariq, Salman Malik (2020) 'ACPHA: A sensor based system for automatic environmental control in hydroponics', Food Science Technology, 40(3): 671-680.
- [10] Divya D, Harsha Mohan Hiremath, Jyothi T U, B S Shubhashree (2020) 'Design of Hydroponics System for Remote Automation', International Journal of Engineering Research and Technology, Volume: 08, issue: 13.

