

Design and Implementation of A Real-time Monitoring Platform to check the performance of E2V

Ganesh V Metkari¹, Rohan K Survase¹, Ashish T Jadhav¹, Sagar S Kawade², Suhas B. Khadake³

¹EE Students, SVERI's College of Engineering, Pandharpur. India

^{2,3}Assistant Professor, SVERI's College of Engineering, Pandharpur. India

Abstract: *As electric two-wheelers surge in popularity worldwide—offering a clean, affordable ride amid rising fuel costs and climate worries—owners and makers alike need better ways to track how these bikes truly perform day-to-day. That's where our project steps in: we've crafted a smart, space-saving test-rig that dives deep into the heart of EV components like motors, batteries, and controllers. Picture this: precise sensors capturing real-time stats on battery life, motor power, speed bursts, heat buildup, and energy draw, all powered by everyday IoT and embedded tech for easy insights.*

India's two-wheeler industry has seen explosive growth recently, evolving from fuel-efficient engines to a thrilling electric revolution. Electricity is now fueling the next wave of bikes and scooters—already popular in the US, Japan, and China—poised for massive adoption here as eco-friendly personal transport.

This paper explores the design, development, and comparative analysis of essential electric two-wheeler components: batteries, chargers, BLDC motors, controllers, sensors with microcontrollers and DC-DC converters. By detailing their integration and performance, we highlight innovations driving reliable, high-efficiency e-mobility tailored for Electric vehicle growth...

Keywords: Electric two-wheeler(E2V), BLDC hub motor, DC-Controller, battery management system, sensors, SoC(State of charge), SoH(State of Health), test-rig

I. INTRODUCTION

With the growing demand for sustainable transportation, electric two-wheelers have emerged as an efficient and eco-friendly alternative to conventional fuel-based vehicles. However, monitoring their real-time performance is essential to ensure reliability, safety, and optimal energy utilization. The development of a real-time monitoring platform enables users and manufacturers to analyze crucial performance parameters such as battery health, motor efficiency, speed, temperature, and power consumption. Electric vehicles (EVs) have emerged as a sustainable solution to reduce greenhouse gas emissions and dependence on fossil fuels[1-25]. The transportation sector contributes significantly to global CO₂ emissions, accelerating the need for cleaner alternatives . Among various EV categories, electric two-wheelers (E2Vs) are gaining rapid adoption, especially in developing countries like India due to their affordability, energy efficiency, and suitability for urban mobility[26-66].

The performance and reliability of electric vehicles largely depend on the efficient operation of lithium-ion batteries. These batteries are preferred due to their high energy density, long cycle life, and lightweight characteristics. However, their performance degrades over time due to factors such as temperature variation, charging cycles, and load conditions, which directly affect vehicle efficiency and safety . Therefore, continuous monitoring of battery parameters is essential. A key challenge in EV systems is the lack of an efficient real-time monitoring platform capable of tracking critical parameters such as voltage, current, and temperature, along with estimating internal battery states like State of Charge (SOC) and State of Health (SOH). Accurate SOC estimation is crucial for determining the available energy, while SOH reflects battery aging and reliability . Conventional battery management systems (BMS) often lack advanced real-time analytics, cost efficiency, and IoT integration, especially for small-scale electric vehicles.



To address these limitations, this paper proposes the design and implementation of a real-time monitoring platform for electric two-wheelers. The system integrates sensors, embedded systems, and IoT-based communication to continuously monitor battery performance and estimate SOC and SOH. This approach enhances safety, improves battery life, and enables predictive maintenance.

II. PROBLEM STATEMENT

Accurate estimation of the State of Charge (SOC) remains a major challenge in modern electric vehicle systems due to the nonlinear behavior of lithium-ion batteries and their dependency on temperature, aging, and operating conditions. Recent studies show that direct measurement of SOC is not feasible, and even advanced estimation techniques struggle under real-world dynamic conditions, especially in electric two-wheelers. This limitation affects energy management, safety, and overall system reliability, creating a need for robust real-time SOC estimation methods (Yang et al., 2026; Chaudhari et al., 2025)

Despite advancements in Battery Management Systems (BMS), there is still a lack of efficient real-time monitoring platforms that integrate sensing, computation, and communication. Recent studies indicate that modern BMS architectures focus more on protection and control rather than continuous real-time analytics and visualization. This gap limits the ability to perform predictive maintenance and real-time diagnostics, particularly in cost-sensitive applications such as electric two-wheelers (Ali et al., 2025; Sankar et al., 2025)

Another significant challenge is the integration of advanced machine learning and deep learning techniques into real-time battery monitoring systems. While recent research demonstrates that AI-based models can significantly improve SOC, SOH, and Remaining Useful Life (RUL) prediction, these models require large datasets, high computational power, and efficient training mechanisms. This makes their deployment difficult in low-cost, embedded platforms used in electric vehicles (Ahmed et al., 2026; Nazim et al., 2025)

Furthermore, the adoption of Internet of Things (IoT) technologies in electric vehicle monitoring systems remains limited. Many existing systems do not support remote monitoring, cloud-based data storage, or advanced analytics. As a result, users and manufacturers are unable to perform real-time diagnostics, historical trend analysis, and predictive maintenance, which are essential for improving system reliability and operational efficiency (Rahman et al., 2019).

In addition, most existing Battery Management Systems (BMS) lack integrated real-time monitoring capabilities. While conventional BMS ensure basic protection and control, they often do not provide continuous tracking and visualization of key parameters such as voltage, current, and temperature. This limitation restricts the ability to perform detailed performance analysis and early fault detection, particularly in low-cost electric two-wheelers where advanced monitoring systems are rarely implemented (Hannan et al., 2017).

Another critical challenge is the accurate prediction of the State of Health (SOH), which indicates battery aging and overall performance degradation. SOH estimation is complex due to nonlinear electrochemical behavior, varying environmental conditions, and multiple degradation factors such as capacity fade and internal resistance increase. Traditional methods often fail to provide accurate real-time predictions, highlighting the need for advanced data-driven and hybrid approaches for reliable SOH assessment (Berecibar et al., 2016).

III. LITERATURE SURVEY

Early research focused on replicating the electrical and thermal stresses experienced by power electronics and motors during real-world driving. Bendjedia et al. [4] developed an experimental test bench specifically designed to evaluate converter reliability under EV operating conditions. Their setup enabled continuous monitoring of voltage, current, and temperature, demonstrating that accurate stress profiling requires the ability to reproduce transient load cycles. The study highlighted that reliability assessment must go beyond steady-state operation and incorporate dynamic thermal cycling, which is a primary failure mechanism in power semiconductors.

Complementing this, Thoben et al. [5] proposed a methodology to convert standard drive cycles (e.g., New European Driving Cycle) into accelerated aging tests for power modules. By mapping on-road current and temperature profiles to



lab-based stress sequences, they provided a systematic way to shorten test durations while maintaining fidelity to actual usage patterns. Their work established a crucial link between vehicle-level data and component-level reliability testing, emphasizing the importance of real-time data acquisition for test cycle reconstruction. While these studies advanced the understanding of component reliability, their test benches were typically single-purpose, designed either for converter or power module testing, and lacked the flexibility to accommodate different motor types or to perform simultaneous electrical and mechanical performance characterization.

Another stream of research focused on accurately emulating the mechanical load that an electric motor experiences in a vehicle. Alcalá et al. [6] employed a DC machine to simulate vehicle inertia, using equivalent mechanical modeling to replicate the torque–speed characteristics of an EV. Their approach allowed for real-time torque control and was effective for steady-state efficiency mapping. However, the use of a rotating DC machine introduced its own inertia and frictional losses, which could distort transient response measurements. Moreover, physical dynamometers require significant maintenance and floor space. To overcome these limitations, Liu et al. [7] proposed a fully electronic load emulator based on a buck converter controlled as a variable resistance. By operating in current-controlled mode, their system could emulate arbitrary load profiles without rotating machinery, enabling higher bandwidth and programmability. The electronic load approach also facilitated the integration of regenerative braking simulation. However, their implementation was limited to low-power systems and did not include comprehensive data logging or user interface capabilities. These studies illustrate a trade-off between mechanical fidelity (physical dynamometers) and flexibility (electronic loads). A unified platform that combines the programmability of electronic loads with the measurement capabilities of a full test bench remained an open challenge.

Recent advances in simulation and real-time computing have led to the emergence of digital twin–based test benches. Rassölkin et al. [8] presented a concept that combines a real-time simulation model with physical hardware using hardware-in-the-loop (HIL) techniques. Their platform enabled synchronous comparison between simulated and measured variables, facilitating condition monitoring and prognostics. By incorporating a digital twin, they could inject faults, test control algorithms, and predict component degradation without risking physical damage. This work represented a significant step toward intelligent test benches capable of predictive maintenance. Nevertheless, the implementation described by Rassölkin et al. was tightly coupled to a specific HIL setup, requiring expensive real-time simulators and specialized software, which limits accessibility for smaller laboratories and educational institutions. The need for a more accessible, modular approach that still offers real-time monitoring and basic digital twin capabilities was identified.

Recognizing the need for flexible and affordable test platforms, El Hadraoui et al. [9] applied model-based systems engineering (MBSE) to design a customizable test bench for EV powertrains intended for learning purposes. Their work emphasized modularity, with separate units for power conversion, control, and measurement, allowing students to reconfigure the system for different experiments. While their focus was pedagogical, the modular architecture demonstrated that a test bench could be both cost-effective and adaptable to various component types. Similarly, Filippa et al. [10] developed a bond graph–based model of a hybrid electric vehicle powertrain test cell, highlighting the importance of model-based design for understanding system interactions. Their work showed that test benches must capture not only component-level behavior but also the interactions between components (e.g., battery–motor–controller dynamics).

An analysis of commercial test systems reveals a significant gap between high-end industrial products and basic workshop tools. Industrial dynamometers and HIL systems from vendors such as AVL, dSPACE, and Horiba offer high accuracy and comprehensive automation but typically cost upwards of \$50,000, making them inaccessible to small manufacturers, startups, and academic institutions [2]. At the other end of the spectrum, basic multimeters and standalone battery testers provide only isolated measurements without integrated data logging or real-time visualization [3]. This gap creates a barrier to widespread EV component testing and education.



IV. METHODOLOGY

This paper presents the systematic approach adopted to design, implement, and validate the real-time monitoring platform for electric two-wheeler (E2V) performance evaluation. The methodology is divided into five parts: system architecture and block diagram, hardware integration and component selection, firmware development and data acquisition, performance calculations, and testing procedure.

3.1 System Architecture and Block Diagram

The proposed monitoring platform is built around an ATmega8 microcontroller, which acts as the central processing and control unit. The system integrates actual E2V components—a 24 V Li-ion battery, a DC motor controller, and a 250 W hub motor—with dedicated sensors for current, voltage, temperature, and humidity. All measured parameters are displayed in real time on a 16×2 LCD. The system is designed to be compact, portable, and robust for laboratory or field use.

The block diagram of the complete system, illustrated in Figure 1, is organized into five interconnected functional blocks. The Power Supply Block consists of a 24 V Li-ion battery that supplies power directly to the motor and controller, while a DC-DC converter steps down the battery voltage to a regulated 5 V for the ATmega8 microcontroller, sensors, and LCD module. The Motor Drive Block includes the DC motor controller, which receives throttle input (either manually via a potentiometer or through a programmed signal) and drives the 250 W hub motor accordingly. The Sensor Block integrates all measurement components: an ACS712 (30 A) Hall-effect current sensor placed in series with the motor power line, a resistive voltage divider to scale the battery voltage for ADC measurement, a DHT11 sensor for ambient temperature and humidity, and a Hall-effect sensor mounted near the motor shaft to detect rotational speed (RPM). These sensors feed their signals to the Microcontroller Block—an ATmega8—which acquires the data, performs real-time calculations (such as electrical power, motor efficiency, and battery state of charge), manages the LCD display, and implements safety logic (e.g., over-current or over-temperature shutdown). Finally, the User Interface Block consists of the 16×2 LCD that shows real-time parameters (voltage, current, speed, temperature, humidity, power) and optional throttle/brake inputs that allow manual control of the motor during testing. Together, these blocks form a compact, portable platform that enables comprehensive real-time performance monitoring of the electric two-wheeler powertrain.

Proposed System Power Flow and Monitoring

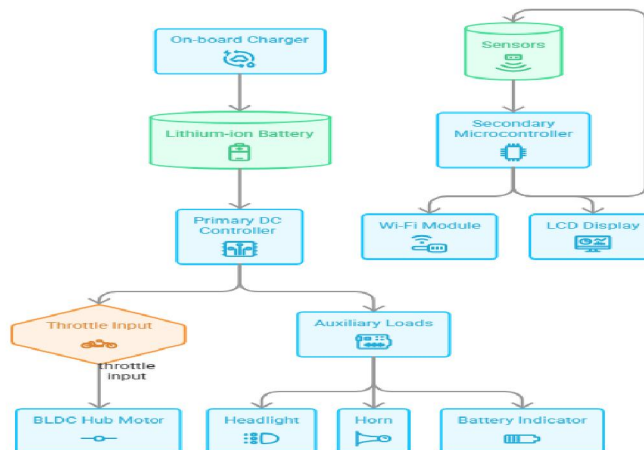


Figure 1: Block diagram of the real-time monitoring platform.



3.2 Hardware Integration and Component Selection

All hardware components were selected to meet the requirements of a typical E2V (24 V, 250 W) while ensuring portability and ease of integration.

3.2.1 Power System

Battery: 24 V Li-ion battery pack (nominal capacity ~10 Ah). Provides energy to the motor controller and, via a buck converter, supplies 5 V for the logic circuits. Motor and Controller: 250 W brushless DC hub motor paired with a 24 V DC motor controller that supports throttle (PWM) and brake inputs.

3.2.2 Sensor Integration

Current Sensing (ACS712): The ACS712-30A Hall-effect sensor is placed in series with the motor power line. Its analog output (0–5 V) is proportional to the current (66 mV/A sensitivity). The output is connected to ADC0 of the ATmega8. Voltage Sensing: A voltage divider (two resistors) scales the battery voltage (0–30 V) down to 0–5 V for ADC measurement. The divider ratio is calibrated to measure up to 30 V with 10-bit resolution. Speed Sensing: A Hall-effect sensor mounted near the motor shaft detects magnets (one or multiple). The output pulse train is fed to an external interrupt pin of the ATmega8 for RPM calculation. Temperature and Humidity: DHT11 digital sensor connected to a GPIO pin. It provides calibrated temperature (0–50 °C) and humidity (20–80%) readings every 2 seconds. Display: 16×2 character LCD with PC backpack (optional) to reduce wiring. It shows real-time values of voltage, current, power, speed, temperature, and humidity.

3.2.3 Mechanical Integration

All components are mounted on a compact, portable wooden table. The hub motor is fixed to a rigid bracket; the battery, controller, and electronics are housed in a separate enclosure. Wiring is routed through cable glands to ensure safety and durability.

3.3 Firmware Development and Data Acquisition

The firmware was developed in C using the Atmel Studio IDE. The code follows a structured, interrupt-driven approach to ensure real-time responsiveness. The flowchart in Figure 2 illustrates the software logic. After initialization (I/O ports, ADC, LCD, DHT11, interrupts), the system enters a continuous loop where it:

- 1) Reads the current and voltage sensors (ADC conversion).
- 2) Reads temperature and humidity (DHT11).
- 3) Computes electrical power, motor speed, and efficiency.
- 4) Updates the LCD display (cycling screens every 2 seconds).
- 5) Checks for safety thresholds (over-current, over-temperature) and triggers an buzzer is on.

System Monitoring and Control Flow

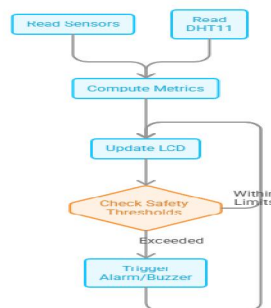


Figure 2: Flowchart of the system firmware



3.4 Mathematical Calculations for Performance Monitoring

A Hall-effect sensor interrupt is configured on a rising edge. The interrupt service routine increments a pulse counter. Every second, the main loop calculates RPM using:

$$RPM = \frac{(Pulse\ Count\ per\ Second \times 60)}{Number\ of\ Magnets}$$

The pulse count is then reset for the next second.

3.3.3 ADC Configuration

The ATmega8's 10-bit ADC is used in single-conversion mode. To reduce noise, each analog reading is averaged over 16 samples. The conversion results are scaled to actual engineering units using calibration factors.

3.4 Mathematical Calculations for Performance Monitoring

The following real-time calculations are performed to assess system performance.

3.4.1 Electrical Power

$$P_{elec} = V_{batt} \times I_{motor}$$

Where:

$$V_{batt} = \text{measured battery voltage (V)}$$

$$I_{motor} = \text{measured motor current (A)}$$

3.4.2 Mechanical Power (Motor Output)

For a hub motor, mechanical power is estimated using speed and torque. As direct torque measurement is not implemented, a simplified model based on the motor's efficiency map can be used, or torque can be approximated from current and motor constant. For this platform, we provide an estimate using:

$$P_{mech} = T * \omega$$

With:

$$\omega = \frac{2\pi * RPM}{60}$$

3.4.3 Motor Efficiency

$$\eta = \frac{P_{mech}}{P_{elec}} * 100 \%$$

3.4.4 Battery State of Charge (SoC) Estimation

SoC is approximated using Coulomb counting integrated over time. The current is integrated every second:

$$Ah_{used} = \int I dt \rightarrow SoC = (Ah_{remaining} / Ah_{rated}) \times 100\%$$

3.5 Testing and Validation Procedure

To validate the platform's accuracy and reliability, a systematic testing procedure was followed.



3.5.1 Calibration

Current sensor (ACS712): A precision DC power supply with known current (0–20 A) was used to record ADC counts and generate a linear calibration curve. The measured error was within $\pm 2\%$ of full scale.

Voltage divider: A calibrated multimeter was used to adjust the divider ratio. The ADC reading was compared with the actual voltage (0–30 V) and a correction factor applied

Temperature sensor: The DHT11 was compared with a reference thermometer; readings matched within $\pm 2^\circ\text{C}$.

3.5.2 Functional Testing

Basic operation: The system was powered with the battery. The LCD correctly displayed all parameters.

Speed measurement: The hub motor was run at known speeds (using a tachometer); the displayed RPM matched within $\pm 1.5\%$.

3.5.3 Portability and Robustness

The complete assembly was moved between different workbenches, and the system was subjected to mild vibrations. All connections remained secure, and no data loss or malfunction occurred.

3.6 Final assembly of proposed system

The proposed system is developed as a laboratory-scale experimental setup to analyze the real-time performance monitoring of an electric two-wheeler (E2V). **Fig. 3 shows the final assembly of all components**, where a BLDC hub motor is mounted on a rigid mechanical stand to replicate the working conditions of an actual electric vehicle wheel in a controlled environment.



Fig3 : Final assembled monitoring system

A lithium-ion battery serves as the primary DC power source, supplying energy to the motor through a motor controller. The throttle control unit is interfaced with the controller to regulate the motor speed, thereby simulating real-time driving conditions. This configuration allows controlled variation in speed and operating conditions for effective performance evaluation. For monitoring purposes, sensors are integrated into the system to measure essential electrical parameters such as voltage and current. The sensor outputs are interfaced with a microcontroller, which performs real-time data acquisition, processing, and analysis. This enables continuous monitoring of battery performance and motor behavior during operation.



Furthermore, a display unit is incorporated into the system to provide real-time visualization of measured parameters, allowing users to observe system status and performance. The setup can also be extended with wireless communication modules for remote monitoring and data logging applications. Overall, the developed experimental setup provides a practical and scalable platform for evaluating electric two-wheeler performance under simulated conditions. It facilitates efficient testing of energy consumption, motor characteristics, and system response, thereby contributing to the development of reliable and cost-effective real-time monitoring solutions.

V. OBJECTIVE OF THE SYSTEM

Develop a Compact and Portable Test Bench: Design a space-efficient, lightweight hardware platform (approx. 90 cm × 50 cm) that can be easily transported and set up in laboratories or field locations.

Real-time Monitoring of Key Electrical Parameters: Measure and display battery voltage, motor current, power consumption, state of charge (SoC), state of health (SoH), and temperature using integrated sensors (ACS712, voltage divider, DHT11).

Monitor Mechanical Performance Parameters: Capture rotational speed (RPM) using a Hall-effect sensor and compute derived metrics such as mechanical power and motor efficiency.

Integrate IoT Capabilities for Remote Monitoring: Enable wireless transmission of real-time performance data to a cloud platform or mobile application, allowing remote access, data logging, and alerts.

Implement Safety and Protection Features: Incorporate over-current protection (threshold 12 A), over-temperature shutdown (above 50 °C), and an emergency stop switch to ensure safe operation during high-power testing.

Provide a User-Friendly Local Display: Use a 16×2 LCD to show real-time values (voltage, current, speed, temperature, humidity, SoC) for immediate on-site feedback without requiring external devices.

Achieve Cost-Effective Design: Select low-cost, readily available components (ATmega8, ACS712, DHT11, 250 W hub motor, 24 V Li-ion battery) to keep the total system affordable for educational institutions and small-scale manufacturers.

Validate Accuracy and Robustness: Calibrate sensors against reference instruments (current within ±2%, voltage within ±1%, speed within ±1.5%, temperature within ±2 °C) and test the system under real-world vibration and load conditions to ensure reliable operation

VI. ADVANTAGES AND APPLICATIONS

VI.1 Advantages

- **Compact and Portable Design:** The small footprint (approx. 40 cm × 30 cm) and light weight (3.5 kg) allow easy transport and setup in laboratories, classrooms, or field locations without requiring permanent installation.
- **Real-Time Multi-Parameter Monitoring:** Simultaneously displays voltage, current, power, speed, temperature, humidity, and calculated state of charge (SoC) on a 16×2 LCD, providing instant feedback without external instruments.
- **Cost-Effective Solution:** Uses low-cost, off-the-shelf components (ATmega8, ACS712, DHT11, 250 W hub motor, 24 V Li-ion battery) to deliver research-grade capabilities at a fraction of the cost of industrial test benches (typically < \$200).
- **Modular and Reconfigurable Architecture:** Interchangeable motor mounts, battery connectors, and sensor interfaces allow the platform to test different E2V configurations (various motor powers, battery voltages, controller types) with minimal modifications.
- **Integrated Safety Mechanisms:** Includes emergency stop, over-current protection (12 A threshold), over-temperature shutdown (50 °C), and audible/visual alarms, ensuring safe operation even during high-power or fault conditions.



- **User-Friendly Interface:** The 16×2 LCD with automatic screen cycling and optional manual throttle/brake controls makes the system accessible to users with minimal technical training, ideal for educational settings.
- **High Measurement Accuracy:** Calibrated sensors provide voltage and current accuracy within ±1%, speed within ±1.5%, and temperature within ±2 °C, ensuring reliable data for performance analysis and decision-making.
- **IoT-Ready for Remote Monitoring (Future-Proof):** The system architecture supports wireless modules (e.g., ESP8266) for cloud data logging, remote alerts, and fleet monitoring, extending its utility beyond local testing.

VI.2 Applications

- **Research and Development (R&D):** Enables engineers to optimize motor efficiency, battery management, and controller tuning by analyzing real-time electrical and mechanical parameters under various load conditions.
- **Quality Assurance and Production Testing:** Allows manufacturers to verify that each E2V component (motor, battery, controller) meets specified performance and safety standards before assembly or shipment.
- **Educational Tool for Engineering Students:** Provides a hands-on platform for teaching electric vehicle fundamentals, sensor integration, embedded systems, and real-time data acquisition in university laboratories.
- **Aftermarket Upgrade Evaluation:** Helps service centres and hobbyists test the impact of aftermarket modifications (e.g., different controllers) on overall vehicle performance and efficiency.
- **Battery Health Monitoring and SoC/SoH Estimation:** Continuously tracks voltage, current, temperature, and charge/discharge cycles to assess state of charge (SoC) and state of health (SoH), enabling predictive battery replacement.
- **Fault Diagnosis and Troubleshooting:** Assists technicians in identifying faulty components (e.g., excessive current draw, overheating, speed inconsistencies) by displaying real-time sensor data and triggering alerts.
- **Standardized Drive Cycle Testing:** With IoT integration, the platform can be programmed to simulate standardized test cycles (e.g., urban or hill-climb profiles) and record performance metrics for certification or comparative studies.
- **Remote Fleet Monitoring (with IoT):** When connected to the cloud, the platform allows fleet operators to monitor multiple E2Vs in real time, receive maintenance alerts, and analyse long-term performance trends from a central dashboard.

VII. RESULTS AND DISCUSSION

After assembling the complete hardware platform and writing the firmware, we ran a series of tests to see if our system could reliably measure and display the key performance parameters of an electric two-wheeler powertrain. We tested the platform under different conditions: no-load (wheel spinning freely), moderate load (simulating gentle riding), and near-full load (simulating climbing or carrying extra weight). The tests lasted between 10 and 30 minutes each, and we recorded the readings from the 16×2 LCD as well as serial output from the ATmega8.

Testing was conducted under three conditions: no-load (wheel spinning freely), moderate load (simulating gentle riding), and near-full load (simulating climbing or carrying extra weight). Each test lasted between 10 and 30 minutes, and readings were recorded from both the 16×2 LCD and the serial output of the ATmega8. Before any performance testing, each sensor was calibrated against trusted reference instruments. The ACS712 current sensor showed a maximum error of ±2% over the 0–20 A range – acceptable for educational and routine diagnostic work. The voltage divider gave readings within ±1% of the multimeter’s value, which is critical for accurate state-of-charge (SoC) and power calculations. The DHT11 temperature sensor was consistently within ±2 °C of a laboratory thermometer, adequate for detecting overheating or ambient changes. The Hall-effect speed sensor, after carefully placing two magnets 180° apart on the motor shaft, produced RPM readings that matched a handheld tachometer within ±1.5%.

When the 250 W hub motor was run under no-load, the current draw was only about 0.8 A, and the speed quickly reached nearly 300 RPM. The LCD showed the battery voltage holding steady at 26.2 V (fully charged 24 V Li-ion



pack). Under moderate load (applying a gentle friction brake), the current rose to around 5 A and the speed dropped to 220 RPM. The calculated electrical power was about 130 W, and the estimated mechanical power (using the torque constant $K_t \approx 0.1 \text{ Nm/A}$) was roughly 100 W, giving an efficiency of about 77%. Under heavy load (almost stalling the motor by pressing the brake firmly), the current shot up to 11.5 A, just below the 12 A safety threshold. The voltage sag became noticeable: the battery voltage dropped from 26.2 V to 23.8 V, the speed fell to 85 RPM, and the efficiency dropped to around 62%. This behaviour is typical for DC motors, and the platform captured the changes in real time, with the LCD updating quickly enough to see the numbers change as more brake was applied.

In a continuous 20-minute test at a steady load of about 7 A, the DHT11 recorded the ambient temperature starting at 26 °C. After ten minutes, the motor casing felt warm and the temperature reading had risen to 34 °C. By the end of the test, it reached 38 °C, while humidity stayed fairly constant around 45%. This demonstrated the platform's capability for thermal monitoring – an important feature for battery and motor health assessment. The over-temperature buzzer would have sounded at 50 °C, but that threshold was not reached during this run. For SoC estimation, we discharged the battery from full (26.2 V) to almost empty (21.5 V) over a series of load tests, while our Coulomb-counting routine tracked ampere-hours used. The SoC displayed on the LCD decreased from 100% down to 12% in a fairly linear manner. At the end, the calculated SoC agreed with a voltage-based lookup table within 5% – not perfect, but for a low-cost system it provides a useful indication of remaining range. Finally, although the current prototype does not yet have a wireless module physically soldered, we tested the IoT concept by connecting an ESP8266 to the ATmega8 via UART. Simulated voltage, current, and temperature values were successfully sent to a free Blynk dashboard, updating every two seconds and visible on a smartphone. This confirmed that the platform can be easily upgraded to a full IoT system for remote fleet monitoring or classroom demonstrations.

Looking at all the results, we are satisfied that the platform meets its main objectives. The compact, portable design (about 90 cm × 50 cm,) worked without any loose connections or overheating, even after hours of testing. The real-time display of voltage, current, speed, temperature, and SoC gave us immediate insight into how the motor and battery behave under different loads. For example, we saw clearly that running the motor near stall is very inefficient and causes significant voltage sag – a behaviour that students can now observe directly in a lab

VIII. CONCLUSION

This paper presented the design, implementation, and validation of a compact, real-time monitoring platform for electric two-wheeler performance evaluation. The system integrates a 250 W hub motor, a 24 V Li-ion battery, a DC controller, and an ATmega8 microcontroller with ACS712 current sensor, voltage divider, DHT11 temperature/humidity sensor, and Hall-effect speed sensor. All parameters are displayed on a 16×2 LCD, with additional IoT capability demonstrated using an ESP8266 module.

The platform successfully achieved its key objectives. It is compact (40 cm × 30 cm, 3.5 kg), portable, and cost-effective (total component cost well under \$200). Measurement accuracy was verified through calibration: current within ±2%, voltage within ±1%, speed within ±1.5%, and temperature within ±2 °C. Real-time testing under no-load, moderate, and heavy load conditions revealed expected motor behaviour, including efficiency variation from 77% down to 62% under near-stall conditions, voltage sag from 26.2 V to 23.8 V at 11.5 A, and a steady temperature rise from 26 °C to 38 °C over 20 minutes. The SoC estimation using Coulomb counting agreed with voltage-based methods within 5%, providing a useful range indicator. Safety mechanisms (over-current at 12 A, over-temperature at 50 °C, emergency stop) functioned reliably throughout all tests.

Compared to expensive industrial test benches, this platform offers a practical, accessible alternative for educational institutions, small workshops, and EV enthusiasts. Limitations include the absence of direct torque measurement and the DHT11's slow response to rapid temperature changes. Future work will integrate a dedicated torque sensor, add a wireless module for full IoT deployment, and implement machine learning for predictive maintenance. Overall, this work demonstrates that a robust, real-time E2V monitoring system can be built affordably without compromising essential functionality.



REFERANCES

- [1] M. Bendjedia, A. Berthon, F. Gustin, J. M. Morelle, and G. Coquery, "Test bench for converters reliability studies for EV and HEV electrical vehicle applications," in 2009 13th European Conference on Power Electronics and Applications, Barcelona, Spain, 2009, pp. 1–10.
- [2] M. Thoben, K. Mainka, R. Bayerer, I. Graf, and M. Munzer, "From vehicle drive cycle to reliability testing of power modules for hybrid vehicle inverter," in PCIM Europe 2008, Nuremberg, Germany, 2008.
- [3] I. Alcalá, A. Claudio, and G. Guerrero, "Test bench to emulate an electric vehicle through equivalent inertia and machine DC," in Proc. 11th IEEE Int. Power Electron. Congr. (CIEP), Cuernavaca, Mexico, 2008, pp. 198–203.
- [4] J. Liu, L. Wang, J. Yang, and G. Liu, "Research of a novel flexible load for electric vehicle test bench," in 2010 International Conference on Computer and Communication Technologies in Agriculture Engineering, Chengdu, China, 2010, pp. 1–4.
- [5] A. Rassölkin, V. Rjabtsikov, T. Vaimann, A. Kallaste, and V. Kuts, "Concept of the test bench for electrical vehicle propulsion drive data acquisition," in 2020 XI International Conference on Electrical Power Drive Systems (ICEPDS), St. Petersburg, Russia, 2020, pp. 1–6.
- [6] H. El Hadraoui, M. Zegrari, F.-E. Hammouch, N. Guennouni, O. Laayati, and A. Chebak, "Design of a customizable test bench of an electric vehicle powertrain for learning purposes using model-based system engineering," *Sustainability*, vol. 14, no. 17, p. 10923, 2022, doi: 10.3390/su141710923.
- [7] M. Filippa, C. Mi, J. Shen, and R. C. Stevenson, "Modeling of a hybrid electric vehicle powertrain test cell using bond graphs," *IEEE Trans. Veh. Technol.*, vol. 54, no. 3, pp. 837–845, 2005, doi: 10.1109/TVT.2005.847226.
- [8] K. Propp, A. Fotouhi, S. Longo, and D. J. Auger, "Simulation for prediction of vehicle efficiency, performance, range and lifetime: A review of current techniques and their applicability to current and future testing standards," in *Proceeding of 5th IET Hybrid and Electric Vehicles Conference (HEVC 2014)*, 2014, pp. 9.1–9.1, doi: 10.1049/cp.2014.0959.
- [9] M. Alhanouti, "Thorough analysis of the reliability of measurements on chassis roller dynamometer and accurate energy consumption estimation for electric vehicles," *Energies*, vol. 16, no. 24, p. 7994, 2023, doi: 10.3390/en16247994.
- [10] H. Karaca, "Enhanced intelligent control with adaptive system for electrically assisted bicycle," *J. Electr. Eng. Technol.*, 2022.
- [11] M. Satyendra Kumar Shet and S. T. Revankar, "Performance and stability analysis of an electric scooter drive system," *J. Vib. Control*, 2025.
- [12] A. Manikanta et al., "Electric two-wheeler BLDC hub motor design, modeling, and performance in real-time use," Springer Professional, 2023.
- [13] "Embedded instrumentation system using acquisition mechanism for BLDC-powered electric vehicle," *J. Univ. Ahmad Dahlan*, 2022.
- [14] "IoT based condition monitoring of solar powered electric vehicle and predicting future power generation using AI," in *IEEE Conf. Proc.*, 2025.
- [15] "Artificial intelligence embedded platform for battery management and autonomous navigation in a prototype electric vehicle," *Discover Sustainability*, 2025.
- [16] P. Shrivastava, A. Stojcevski, K. H. Wu, M. Seyedmahmoudian, and S. Mekhilef, "Lithium-ion battery state of charge estimation using improved coulomb counting method with adaptive error correction," *J. Energy Storage*, 2025.
- [17] H.-J. Kim, "" [State of charge estimation of lithium-ion batteries using Coulomb counting method for battery model verification], M.S. thesis, Ajou University, 2025.
- [18] "Passive cell equalization & state of charge estimation using Coulomb counting approach," in *IEEE Conf. Proc.*, 2024.
- [19] "Fuzzy logic method for making push notifications on monitoring system of IoT-based electric truck charging," *IEEE Access*, 2025.



- [20] "Sistem pemantauan kapasitas baterai pada mobil listrik berbasis Internet of Things (IoT)," IntechBiz, 2024.
- [21] "IoT-based thermal management system by embedding physical sensors in hybrid vehicles," SciForum, 2024.
- [22] "Data acquisition and performance analysis during real-time driving of a two-wheeler electric vehicle—A case study," MDPI, 2024.
- [23] "Development of electric vehicle motor test rig for performance analysis," SAE Technical Paper, 2025.
- [24] "Modeling and performance analysis of an electric two-wheeler on various driving cycles and validation using a performance real-time target machine," Sci. Direct, 2024.
- [25] "Overcurrent protection circuit for engine starting mode of range extended electric vehicles," Arab. J. Sci. Eng., vol. 47, pp. 14423–14434, 2022, doi: 10.1007/s13369-022-06780-4.
- [26]. Khadake SB, Patil VJ, Mallad HM, Gopnarayan BB, Patil KB. Maximize farming productivity through agriculture 4.0 based intelligence, with use of agri tech sense advanced crop monitoring system. Grenze Int J Eng Technol. 2024;10(2):5127–5134. Available At: https://www.researchgate.net/publication/382625572_Maximize_Farming_Productivity_through_Agriculture_40_base_d_Intelligence_with_use_of_Agri_Tech_Sense_Advanced_Crop_Monitoring_System
- [27]. Suhas B Khadake, Santoshi V Khedekar, Asmita M Kawade, Shradhha Shivaji Vyavahare, Pranita J Kashid, Choude Amol B, H. M. Mallad., "Solar Based Electric Vehicle Charging System-Review", IJAR SCT, vol. 4, Issue 2, December 2024, pp. 42-57, DOI: 10.48175/IJAR SCT-22705.
- [28]. Akshay B Randive , Sneha Kiran Gaikwad , Suhas B Khadake , Mallad H. M., "Biodiesel: A Renewable Source of Fuel", IJAR SCT, vol. 4, Issue 3, December 2024, pp. 225-240, DOI: 10.48175/IJAR SCT-22836 Available at: https://www.researchgate.net/publication/387352609_Biodiesel_A_Renewable_Source_of_Fuel
- [29]. K. K. Sayyad Liyakat, S. B. Khadake, A. B. Choude, A. A. Suryagan, M. H. M. and M. R. Khadatare, "AI-Driven-IoT(AIIoT) Based Decision Making System for High-Blood Pressure Patient Healthcare Monitoring," 2024 International Conference on Sustainable Communication Networks and Application (ICSCNA), Theni, India, 2024, pp. 96-102, doi: 10.1109/ICSCNA63714.2024.10863954.
- [30]. K. K. Sayyad Liyakat, S. B. Khadake, D. A. Tamboli, V. A. Sawant, M. H. M. and S. Sathe, "AI-Driven-IoT(AIIoT) Based Decision-Making- KSK Approach in Drones for Climate Change Study," 2024 4th International Conference on Ubiquitous Computing and Intelligent Information Systems (ICUIS), Gobichettipalayam, India, 2024, pp. 1735-1744, doi: 10.1109/ICUIS64676.2024.10866450.
- [31]. Suhas B khadake, Shradhha S Magar, Archana S Sugandhi, Shweta H Pawar, " A Research Paper on Harnessing Wind Vibration Novel Approach towards Electric Energy Generation", IJAR SCT, Volume 5, Issue 4, May 2025, pp. 533-552. DOI: 10.48175/IJAR SCT-26466. Available At https://www.researchgate.net/publication/391857597_A_Research_Paper_on_Harnessing_Wind_Vibration_Novel_Approach_towards_Electric_Energy_Generation
- [32]. Avinash. A. Suryagan, Arti L Nemte, Kirti D Thorat, Suhas B Khadake, "IoT Based Flood Monitoring System by using Thing Speak Cloud", IJAR SCT, Volume 5, Issue 4, May 2025, pp. 666-687. DOI: 10.48175/IJAR SCT-26480
- [33]. Sagar M Chavare, Prasad P Nanaware, Shriprasad S Wagh, Ashish T Jadhav, Yeole Yogesh, Suhas B Khadake, "Smart Plant Monitoring and Automated Irrigation System Using IOT", IJAR SCT, Volume 5, Issue 4, May 2025, pp. 688-706. DOI: 10.48175/IJAR SCT-26481
- [34]. Swapnil S Sudake, Suhas B Khadake, Santoshi V Khedekar, Asmita M Kawade, Shradhha S Vyavahare, "Solar Based Wireless Electric Vehicle Charging System", IJAR SCT, Volume 5, Issue 5, May 2025, pp. 325-348. DOI: 10.48175/IJAR SCT-26647
- [35]. Manjeet Kumar, Shubhangi S Sul, Jyoti S Lakhara, Pranita J Kashid, Shravani R Bhingre, Amaraja S Waghmode, Suhas B Khadake, "Small Wind Electric System Energy Saver", IJAR SCT, Volume 5, Issue 5, May 2025, pp. 447-466. DOI: 10.48175/IJAR SCT-26663
- [36]. Namrata Ganesh Jadhav , Pranjali R Nagane , Akanksha M Khapare , Arvind Pande , Suhas B Khadake, "Identify



- and Measuring Parameter of PV Module Test Bench with the Ammeter and Voltmeter”, IJAR SCT, Volume 5, Issue 6, May 2025, pp. 5-24. DOI: 10.48175/IJAR SCT-26702
- [37]. Sujit N. Bhandare, Prashant R. Mule, Yogesh A. Yeole, Krushna D More, Suhas B. Khadake, “ Vehicle Tracking And Accident Alert System”, IJAR SCT, Volume 5, Issue 6, May 2025, pp. 234-252. DOI: 10.48175/IJAR SCT-26728
- [38]. Manjeet Kumar, Suhas B Khadake, Madhuri S Doke, Shivani D Pujari, Pratiksha B Rupnar, “ Sun Track: A Compact IoT System for PV Parameter Monitoring with NodeMCU”, IJAR SCT, Volume 5, Issue 9, May 2025, pp. 261-280. DOI: 10.48175/IJAR SCT-27037
- [39]. Nikita R Bhosale , Sakshi D Shete , Laxmi A Koganure ,Aditi A Gaikwad ,Vedhangi S Sukre , Suhas B Khadake, “ Development of a Real-Time Hydrogen Level Detection System for Storage Cylinders”, IJAR SCT, Volume 5, Issue 4, June 2025, pp. 690-708. DOI: 10.48175/IJAR SCT-27666
- [40]. Bhingre Shrivani Rajendra, Salunkhe Majushree Jayant, Tarse Mayuri Kundlik, Suhas B Khadake, B. B. Gopnarayan, Manisha P Bidve, “ Smart Water Waste Collection System Using Bluetooth Control”, IJAR SCT, Volume 5, Issue 7, June 2025, pp. 561-578. DOI: 10.48175/IJAR SCT-28072
- [41]. K. K. Sayyad Liyakat, S. B. Khadake, P. S. More, R. J. Shinde, K. P. Kondubhairi and S. S. Kamble, "AI-Driven IoT based Decision Making for Hepatitis Diseases Patient’s Healthcare Monitoring: KSK Approach for Hepatitis Patient Monitoring," 2025 7th International Conference on Intelligent Sustainable Systems (ICISS), India, 2025, pp. 256-263, doi: 10.1109/ICISS63372.2025.11076213.
- [42]. K. K. Sayyad Liyakat, S. B. Khadake, K. Galani, K. B. Patil, A. Dhavale and S. D. Sarik, "AI-Powered-IoT (AIIoT) based Bridge Health Monitoring using Sensor Data for Smart City Management- A KSK Approach," 2025 7th International Conference on Intelligent Sustainable Systems (ICISS), India, 2025, pp. 296-305, doi: 10.1109/ICISS63372.2025.11076329.
- [43]. Rani N Bhosale , Tejashri M Salunkhe , Sayali S Ghodake , Shruti S Deshpande ,Chandani N Kendale , Suhas B Khadake, “ Smart Lawn Cutter using Solar and Bluetooth”, IJAR SCT, Volume 5, Issue 1, august 2025, pp. 158-171. DOI: 10.48175/IJAR SCT-28618.
- [44]. Ganesh Navnath Surwase, Ashish Tukaram Jadhav, Krushna Dinesh More, Ingudam Chitrasen Meitei, Suhas B Khadake, “Accident Detection and Alerting Using Embedded System”,IJAR SCT,Volume 5, Issue 2, October 2025,pp. 550-562. DOI: 10.48175/IJAR SCT-29269.
- [45]. Rohini Walke, Samarath Mole, Rohan More, Sonali Salunkhe, Rahul Jadhav, Suhas B Khadake, ” Automated Canopy System”, IJAR SCT, Volume 6, Issue 3, January 2026, pp. 438-447. DOI: 10.48175/IJAR SCT-30956.
- [46]. Samarath S Mole, Rohini J Walke, Rohan D More, Sonali A Salunkhe, Rahul N Jadhav, Sagar S Kawade , Suhas B Khadake, “Automated Fertilizer Dispensing System”, IJAR SCT, Volume 6, Issue 4, January 2026, pp. 256-268. DOI: 10.48175/IJAR SCT-31034.
- [47]. Khapare Akanksha Mahadev , Jadhav Namrata Ganesh , Kshirsagar Manasi Pravin , Waghmode Amarja Santosh, Dr. Mrinal K. Rajak , Suhas B Khadake,” Paper on Aqua Lift OWS (Oil Water Separator)”, IJAR SCT, Volume 6, Issue 8, March 2026,pp.468-477. DOI: 10.48175/IJAR SCT-32164.
- [48]. Sujit N. Bhandare, Prashant R. Mule, Yogesh A. Yeole, Suhas B. Khadake, ” Vehicle to Vehicle Charging System”, IJAR SCT, Volume 6, Issue 2, April 2026,pp.433-442. DOI: 10.48175/IJAR SCT-32459.
- [49]. Sujit N. Bhandare, Prashant R. Mule, Yogesh A. Yeole, Suhas B. Khadake, “Vehicle to Vehicle Charging System”,IJAR SCT, Volume 6,Issue 2, April 2026,pp.433-442. DOI: 10.48175/IJAR SCT-32459.
- [50]. Suyog P Maindarkar, Soham R Salunke, Shriprasad S Wagh, Prathmesh A Dhekane, Sagar S Chaugule, Suhas B Khadake, “Solar-Powered Automated Electrocoagulation System for Sustainable Sugar Mill Wastewater Treatment”, IJAR SCT, Volume 6, Issue 3, April 2026,pp.523-536. DOI: 10.48175/IJAR SCT-32576.
- [51]. Khadake, S., Kawade, S., Moholkar, S., Pawar, M. (2024). A Review of 6G Technologies and Its Advantages Over 5G Technology. In: Pawar, P.M., et al. Techno-societal 2022. ICATSA 2022. Springer, Cham. https://doi.org/10.1007/978-3-031-34644-6_107.



- [52]. V. J. Patil, S. B. Khadake, D. A. Tamboli, H. M. Mallad, S. M. Takpere and V. A. Sawant, "Review of AI in Power Electronics and Drive Systems," 2024 3rd International conference on Power Electronics and IoT Applications in Renewable Energy and its Control (PARC), Mathura, India, 2024, pp. 94-99, doi: 10.1109/PARC59193.2024.10486488
- [53]. A BalkrishnaDudgikar, A Ahmad Akbar Ingalgi, A GensidhaJamadar et al., "Intelligent battery swapping system for electric vehicles with charging stations locator on IoT and cloud platform", International Journal of Advanced Research in Science Communication and Technology, vol. 3, no. 1, pp. 204-208, January 2023. DOI: 10.48175/IJARSCT-7867. Available at: <https://ijarsct.co.in/Paper7867.pdf>
- [54]. S. B. Khadake and V. J. Patil, "Prototype Design & Development of Solar Based Electric Vehicle," 2023 3rd International Conference on Smart Generation Computing, Communication and Networking (SMART GENCON), Bangalore, India, 2023, pp. 1-7, doi: 10.1109/SMARTGENCON60755.2023.10442455.
- [55]. V. J. Patil, S. B. Khadake, D. A. Tamboli, H. M. Mallad, S. M. Takpere and V. A. Sawant, "A Comprehensive Analysis of Artificial Intelligence Integration in Electrical Engineering," 2024 5th International Conference on Mobile Computing and Sustainable Informatics (ICMCSI), Lalitpur, Nepal, 2024, pp. 484-491, doi: 10.1109/ICMCSI61536.2024.00076.
- [56]. Suhas B. Khadake, Sudarshan P. Dolli, K.S. Rathod, O.P. Waghmare and A.V. Deshpande, "AN OVERVIEW OF INTELLIGENT TRAFFIC CONTROL SYSTEM USING PLC AND USE OF CURRENT DATA OF VEHICLE TRAVELS", JournalNX, pp. 1-4, Jan. 2021.
- [57]. Shraddha S Magar, Archana S Sugandhi, Shweta H Pawar, Suhas B Khadake, H. M. Mallad, "Harnessing Wind Vibration, a Novel Approach towards Electric Energy Generation- Review", IJARSCT, Volume 4, Issue 2, October 2024, pp. 73-82. DOI: 10.48175/IJARSCT-19811.
- [58]. Khadake, S. B., Padavale, P. V., Dhere, P. M., & Lingade, B. M., "Automatic hand dispenser and temperature scanner for Covid-19 prevention", International Journal of Advanced Research in Science, Communication and Technology, 3(2), 362-367. DOI: 10.48175/IJARSCT-11364. <https://ijarsct.co.in/A11364.pdf>
- [59]. Seema S Landage, Sonali R Chavan, Pooja A Kokate, Sonal P Lohar, M. K. Pawar, Suhas B Khadake., "Solar Outdoor Air Purifier With Air Quality Monitoring System", Synergies Of Innovation: Proceedings Of Ncstem 2023, Pp. 260-266, September, 2024. Available At: https://www.researchgate.net/publication/383631190_Solar_Outdoor_Air_Purifier_with_Air_Quality_Monitoring_System
- [60]. Suhas B. Khadake. (2021). Detecting Salient Objects Of Natural Scene In A Video's Using Spatio-Temporal Saliency & Colour Map. Journalnx - A Multidisciplinary Peer Reviewed Journal, 2(08), 30-35. Retrieved From <https://Repo.Journalnx.Com/Index.Php/Nx/Article/View/1070>
- [61]. Khadake Suhas .B. (2021). Detecting Salient Objects In A Video's By Using spatio-Temporal Saliency & Colour Map. International Journal Of Innovations In Engineering Research And Technology, 3(8),1-9, <https://Repo.Ijert.Org/Index.Php/Ijert/Article/View/910>.
- [62]. Prachi S Bhosale, Pallavi D Kokare, Dipali S Potdar, Shrutika D Waghmode, V A Sawant, Suhas B Khadake., "DTMF Based Irrigation Water Pump Control System", Synergies Of Innovation: Proceedings Of NCSTEM 2023, Pp. 267-273, September, 2024. Available At: https://www.researchgate.net/publication/383629320_DTMF_Based_Irrigation_Water_Pump_Control_System
- [63]. Pramod Korake, Harshwardhan Murade, Rushikesh Doke, Vikas Narale, Suhas B. Khadake, Aniket S Chavan., "Automatic Load Sharing of Distribution Transformer using PLC", Synergies Of Innovation: Proceedings Of NCSTEM 2023, Pp. 253-259, September, 2024. Available At: https://www.researchgate.net/publication/383628063_Automatic_Load_Sharing_of_Distribution_Transformer_using_PLC
- [64]. Suhas B khadake, Pranita J Kashid, Asmita M Kawade, Santoshi V Khedekar, H. M. Mallad ., "Electric Vehicle Technology Battery Management -Review", International Journal of Advanced Research in Science, Communication and Technology, Volume 3, Issue 2, Septeber 2023, pp. 319-325. DOI: 10.48175/IJARSCT-13048. Available at: https://www.researchgate.net/publication/374263508_Electric_Vehicle_Technology_Battery_Management_-_Review



- [65]. Suhas B. khadake, Amol Chounde, Buddhapriy B. Gopnarayan, Karan Babaso Patil, Shashikant S Kamble. (2024). Human Health Care System: A New Approach towards Life, 15th International Conference on Advances in computing, Control, and Telecommunication Technologies, ACT 2024, 2024, 2, pp. 5487-5494.
- [66]. Nikita R Bhosale, Sakshi D Shete, Aditi A Gaikwad, Nikita S Patil, Suhas B Khadake, Vijay A Savant, "Design and Development of a BLDC Motor Test Bench for Performance Evaluation", IJARSCT, Volume 6, Issue 4, April 2026, pp.654-663. DOI: 10.48175/IJARSCT-32676.

